

# Technical datasheet

## Jacmounts pat. PRG 76 /405

Art. no.  
**1.16076.43**

Extremely stable. Best suited for light machines and systems for which there is permanently defined ground contact.

Max. load  
**450 daN**

### Article information

Extremely stable. Best suited for light machines and systems for which there is permanently defined ground contact.

Type	PRG 76 /405
Name	Jacmounts pat.
Art. no.	1.16076.43
Color	RAL 7001 silver grey
Other colors upon request.	
Surface treatment	painted

### Technical Data

Max. load [lbs]	1000
Weight [kg]	0.296
Temperature range from [°C]	-20
Temperature range to [°C]	80

### Dimensions

Height H [mm]	20
Height H <sub>min</sub> [mm] M10	42
Height H <sub>min</sub> [mm] M12	42.5
Height H <sub>min</sub> [mm] M16	50
Diameter D [mm]	76

### Pad equipment

Bottom pad type	405
Pad thickness unloaded [mm]	5
Coefficient of friction on concrete with fine mortar	0.9
Hardness [° Shore A]	40 - 45
Bottom pad area A <sub>1</sub> [cm <sup>2</sup> ]	44

### Suitable studs, special studs, leveling screws, leveling sockets

	Special studs G1	M10, M12, M16	<a href="#">more</a>
---	------------------	---------------	----------------------

### Useful remarks

The body of the element and the special levelling stud are, once installed, connected with each other, forming one single unit. The special levelling stud is exchangeable at any time by means of a patented connection.


### Remark extent of supply

Special studs need to be ordered separately.

### Type illustration



### Dimensioned sketch

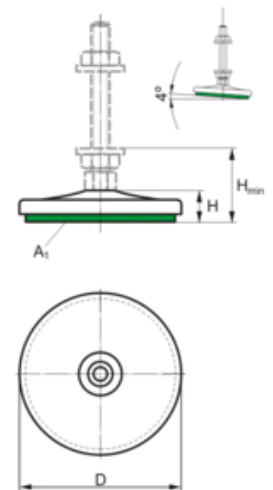

### Mounting sketch

