

# Technical datasheet

## Jacmounts pat. PRG 125 /705

Art. no.  
**1.16125.58**

Application secure thanks to high level of damping. Very good stability due to high ground adhesion.

Max. load  
**2000 daN**

### Article information

Application secure thanks to high level of damping. Very good stability due to high ground adhesion.

Type	PRG 125 /705
Name	Jacmounts pat.
Art. no.	1.16125.58
Color	RAL 7001 silver grey
Other colors upon request.	
Surface treatment	painted

### Technical Data

Max. load [lbs]	4500
Weight [kg]	0.854
Temperature range from [°C]	-15
Temperature range to [°C]	100


### Dimensions

Height H [mm]	24.5
Height H <sub>min</sub> [mm] M16	52
Height H <sub>min</sub> [mm] M20	63
Height H <sub>min</sub> [mm] M24	73.5
Diameter D [mm]	125

### Pad equipment

Bottom pad type	705
Pad thickness unloaded [mm]	5
Coefficient of friction on concrete with fine mortar	0.8
Hardness [° Shore A]	70 - 75
Bottom pad area A <sub>1</sub> [cm <sup>2</sup> ]	104

### Suitable studs, special studs, leveling screws, leveling sockets

	Special studs G2	M16, M20, M24	<a href="#">more</a>
---	------------------	---------------	----------------------

### Useful remarks

The body of the element and the special levelling stud are, once installed, connected with each other, forming one single unit. The special levelling stud is exchangeable at any time by means of a patented connection.


### Remark extent of supply

Special studs need to be ordered separately.

### Article illustration



### Dimensioned sketch

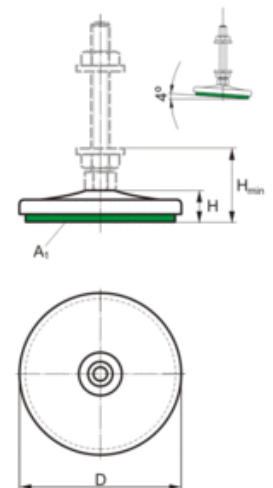

### Mounting sketch

