

# Technical datasheet

## Jacmounts pat. PRG 170 /405

Art. no.  
**1.16170.43**

Extremely stable. Best suited for light machines and systems for which there is permanently defined ground contact.

Max. load  
**2000 daN**

### Article information

Extremely stable. Best suited for light machines and systems for which there is permanently defined ground contact.

Type	PRG 170 /405
Name	Jacmounts pat.
Art. no.	1.16170.43
Color	RAL 7001 silver grey
Other colors upon request.	
Surface treatment	painted

### Technical Data

Max. load [lbs]	4500
Weight [kg]	1.7
Temperature range from [°C]	-20
Temperature range to [°C]	80


### Dimensions

Height H [mm]	25
Height H <sub>min</sub> [mm] M16	52.5
Height H <sub>min</sub> [mm] M20	63.5
Height H <sub>min</sub> [mm] M24	74.5
Diameter D [mm]	170

### Pad equipment

Bottom pad type	405
Pad thickness unloaded [mm]	5
Coefficient of friction on concrete with fine mortar	0.9
Hardness [° Shore A]	40 - 45
Bottom pad area A <sub>1</sub> [cm <sup>2</sup> ]	201

### Suitable studs, special studs, leveling screws, leveling sockets

	Special studs G2	M16, M20, M24	<a href="#">more</a>
---	------------------	---------------	----------------------

### Useful remarks

The body of the element and the special levelling stud are, once installed, connected with each other, forming one single unit. The special levelling stud is exchangeable at any time by means of a patented connection.


### Remark extent of supply

Special studs need to be ordered separately.

### Type illustration



### Dimensioned sketch

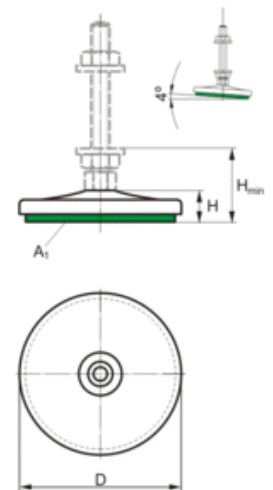

### Mounting sketch

