

Technical datasheet

Jacmounts pat. PRG 170 /905

Art. no.
1.16170.73

For applications with high static load. Excellent leveling stability and high overall stability. Very economical.

Max. load
4500 daN

Article information

For applications with high static load. Excellent leveling stability and high overall stability. Very economical.

Type	PRG 170 /905
Name	Jacmounts pat.
Art. no.	1.16170.73
Color	RAL 7001 silver grey
Other colors upon request.	
Surface treatment	painted

Technical Data

Max. load [lbs]	10000
Weight [kg]	1.65
Temperature range from [°C]	-20
Temperature range to [°C]	80


Dimensions

Height H [mm]	25
Height H _{min} [mm] M16	52.5
Height H _{min} [mm] M20	63.5
Height H _{min} [mm] M24	74.5
Diameter D [mm]	170

Pad equipment

Bottom pad type	905
Pad thickness unloaded [mm]	5
Coefficient of friction on concrete with fine mortar	0.8
Hardness [° Shore A]	90 - 95
Bottom pad area A ₁ [cm ²]	201

Suitable studs, special studs, leveling screws, leveling sockets

	Special studs G2	M16, M20, M24	more
---	------------------	---------------	----------------------

Useful remarks

The body of the element and the special levelling stud are, once installed, connected with each other, forming one single unit. The special levelling stud is exchangeable at any time by means of a patented connection.


Remark extent of supply

Special studs need to be ordered separately.

Type illustration



Dimensioned sketch

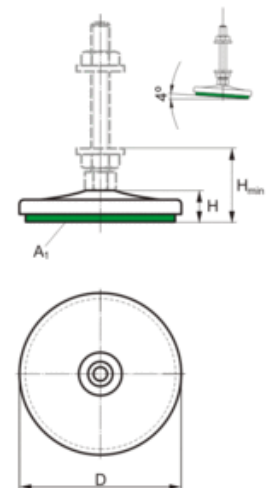

Mounting sketch

