

Technical datasheet

Jacmounts pat. PRG 230 /705

Art. no.
1.16230.58

Application secure thanks to high level of damping. Very good stability due to high ground adhesion.

Max. load
6000 daN

Article information

Application secure thanks to high level of damping. Very good stability due to high ground adhesion.

Type	PRG 230 /705
Name	Jacmounts pat.
Art. no.	1.16230.58
Color	RAL 7001 silver grey
Other colors upon request.	
Surface treatment	painted

Technical Data

Max. load [lbs]	13000
Weight [kg]	4.2
Temperature range from [°C]	-15
Temperature range to [°C]	100


Dimensions

Height H [mm]	27
Height H _{min} [mm] M16	53
Height H _{min} [mm] M20	63.5
Height H _{min} [mm] M24	74.5
Diameter D [mm]	230

Pad equipment

Bottom pad type	705
Pad thickness unloaded [mm]	5
Coefficient of friction on concrete with fine mortar	0.8
Hardness [° Shore A]	70 - 75
Bottom pad area A ₁ [cm ²]	380

Suitable studs, special studs, leveling screws, leveling sockets

	Special studs G2	M16, M20, M24	more
---	------------------	---------------	----------------------

Useful remarks

The body of the element and the special levelling stud are, once installed, connected with each other, forming one single unit. The special levelling stud is exchangeable at any time by means of a patented connection.


Remark extent of supply

Special studs need to be ordered separately.

Type illustration



Dimensioned sketch

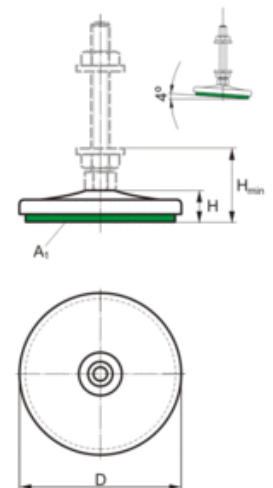

Mounting sketch

