

# Technical datasheet

## Jacmounts pat. PRG 230 /905

Art. no.  
**1.16230.73**

For applications with high static load. Excellent leveling stability and high overall stability. Very economical.

Max. load  
**6000 daN**

### Article information

For applications with high static load. Excellent leveling stability and high overall stability. Very economical.

Type	PRG 230 /905
Name	Jacmounts pat.
Art. no.	1.16230.73
Color	RAL 7001 silver grey
Other colors upon request.	
Surface treatment	painted

### Technical Data

Max. load [lbs]	13000
Weight [kg]	4.186
Temperature range from [°C]	-20
Temperature range to [°C]	80


### Dimensions

Height H [mm]	27
Height H <sub>min</sub> [mm] M16	53
Height H <sub>min</sub> [mm] M20	63.5
Height H <sub>min</sub> [mm] M24	74.5
Diameter D [mm]	230

### Pad equipment

Bottom pad type	905
Pad thickness unloaded [mm]	5
Coefficient of friction on concrete with fine mortar	0.8
Hardness [° Shore A]	90 - 95
Bottom pad area A <sub>1</sub> [cm <sup>2</sup> ]	380

### Suitable studs, special studs, leveling screws, leveling sockets

	Special studs G2	M16, M20, M24	<a href="#">more</a>
---	------------------	---------------	----------------------

### Useful remarks

The body of the element and the special levelling stud are, once installed, connected with each other, forming one single unit. The special levelling stud is exchangeable at any time by means of a patented connection.


### Remark extent of supply

Special studs need to be ordered separately.

### Type illustration



### Dimensioned sketch

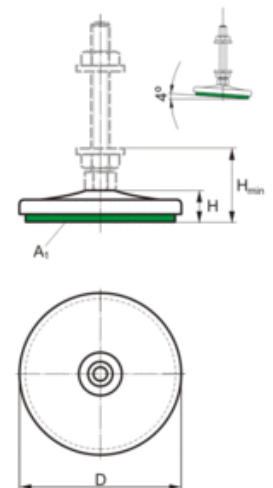

### Mounting sketch

